



brush mulchers

Baumalight brush mulchers effectively mulch large areas of brush and felled tree tops without you lifting a twig

MF360 • MF548 • MF760 • MF860

BAUMALight

brush mulcher features

Baumalight brush mulcher features offer powerful performance, long-term dependability and, for the operator, ease-of-use.

① Heavy-duty mulcher frames are designed to handle rough use

② Mulchers offer complete control from skid steer seat

③ Powerful mulching on low-flow hydraulics
MF760 uses high-flow hydraulics up to 40GPM. MF860 is PTO-driven.

④ Safety pusher bar pushes trees and brush away from operator

⑤ Flex couplers provide hydraulic motor bearing protection

⑥ Step point grip pads ease entry and exit

⑦ Mulcher Teeth Facts

The MF360 cuts with unique, reversible flail blades

- ▶ Mulchers bite deep with knife-tipped, angled tooth design.
- ▶ High tooth population ensures smooth cutting and minimal wear per tooth.
- ▶ Spiraled, staggered teeth pattern guarantees fine mulching.
- ▶ Teeth are carbide-tipped for longer tooth life and smoother operation.


▶ Teeth replacement is 'as needed'—one or two teeth at a time, never as a complete set. Only the tip requires replacement, reducing cost.

⑧ Super-strength timer belt cannot slip even in severe applications
MF360 uses heavy-duty gearbox

⑨ Adjustable shoes allow for your choice of two cutting heights

⑩ Chain-link curtains contain flying debris

⑪ MF548 and MF760 models ship with pressure gauges to monitor load. This allows the operator to travel at accelerated speeds in low-density brush.

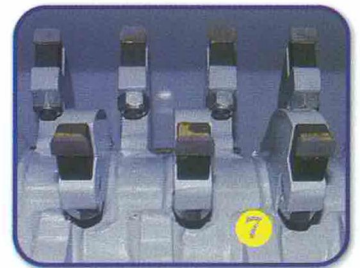

models

Your choice of four mulcher models ensures the perfect fit for your specific needs.

MF360



2½" cutting height is ideal for close cutting.



Recommended for: cutting heavy grass and low brush. Features unique swing blade design that maximizes cutting performance. Blades are double-sided and can be reversed when dull.

MF548

Recommended for: high performance brush cutting on low-flow hydraulics. Take on brush with the flagship MF548 and discover how effective mulching on low-flow hydraulics can be.




MF760



Recommended for: high performance brush cutting on high-flow hydraulics of up to 40GPM. The MF760 is a perfect fit for the midsize or largest skid steers available.

MF860

The PTO-driven MF860 turns your tractor into a brush mulching machine, with the direct drive providing ultimate cutting power.

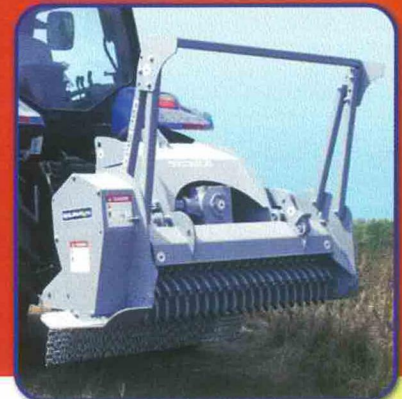

Specifications

	MF360	MF548	MF760	MF860
Path Width	70"	62"	75"	
Rotor Width	60"	48"	60"	
Cutting Height from ground	2½"	0 to 1½"		0 to -1½"
Rotor RPM	800	1200	1750	1800
Number of Cutters	2	104	126	
Hitch Type	skid steer			3-point
Hitch Size	universal			CAT II
Max PSI	3,000			
Max Flow (GPM)	24		42	20
Recommended Flow (GPM)	22		40	10
Min Flow (GPM)	10	12	20	2
Hose Size	¾"		1"	¼"
Max HP	check flow and psi			70
Min HP	40	35	60	45
System Protection	built-in relief			slip clutch
Needs Case Drain	Check Price List	Check Price List	yes	no
Shipping Size length x width x height	36" x 80" x 90"	64" x 36" x 40"	80" x 48" x 65"	
Unit Weight (lb)	1,240	1,290	1,800	2,100

Maximum Recommended Brush Size

MF360	12GPM	15GPM	20GPM	24GPM	MF760	20GPM	30GPM	35GPM	40GPM
Brush Size @ 2,500 PSI	1"	1¼"	1½"	2"	Brush Size @ 2,500 PSI	1½"	3"	4"	5"
Brush Size @ 3,000 PSI	1¼"	1½"	2"	2"	Brush Size @ 3,000 PSI	2"	4"	5"	6"
double all sizes for intermittent cutting					double all sizes for intermittent cutting				
MF548	12GPM	15GPM	20GPM	24GPM	MF860	45HP	60HP	65HP	70HP
Brush Size @ 2,500 PSI	1"	1¼"	1½"	2"	Regular drive	3"	4"	5"	6"
Brush Size @ 3,000 PSI	1¼"	1½"	2"	2½"	Creeper Gear	5"	6"	7"	8"
double all sizes for intermittent cutting					Hydrostatic transmission	8"	10"	12"	14"
double all sizes for intermittent cutting					double all sizes for intermittent cutting				

November 2008

Visit www.baumalight.com for more Baumalight products or dealer information.

Tree Spades | Trenchers | PTO Generators | Mulchers | Stump Grinders | Auger Drives

Baumalight sold by:

BAUMAlight

Manufactured by MTB MFG Inc.
4575 Powell Road, Wallenstein, Ontario N0B 2S0
Toll-free: 1.866.820.7603 Fax: 519.698.1087
e-mail: sales@baumalight.com