


BAUMAlight

STUMP GRINDERS



MODEL
3P34

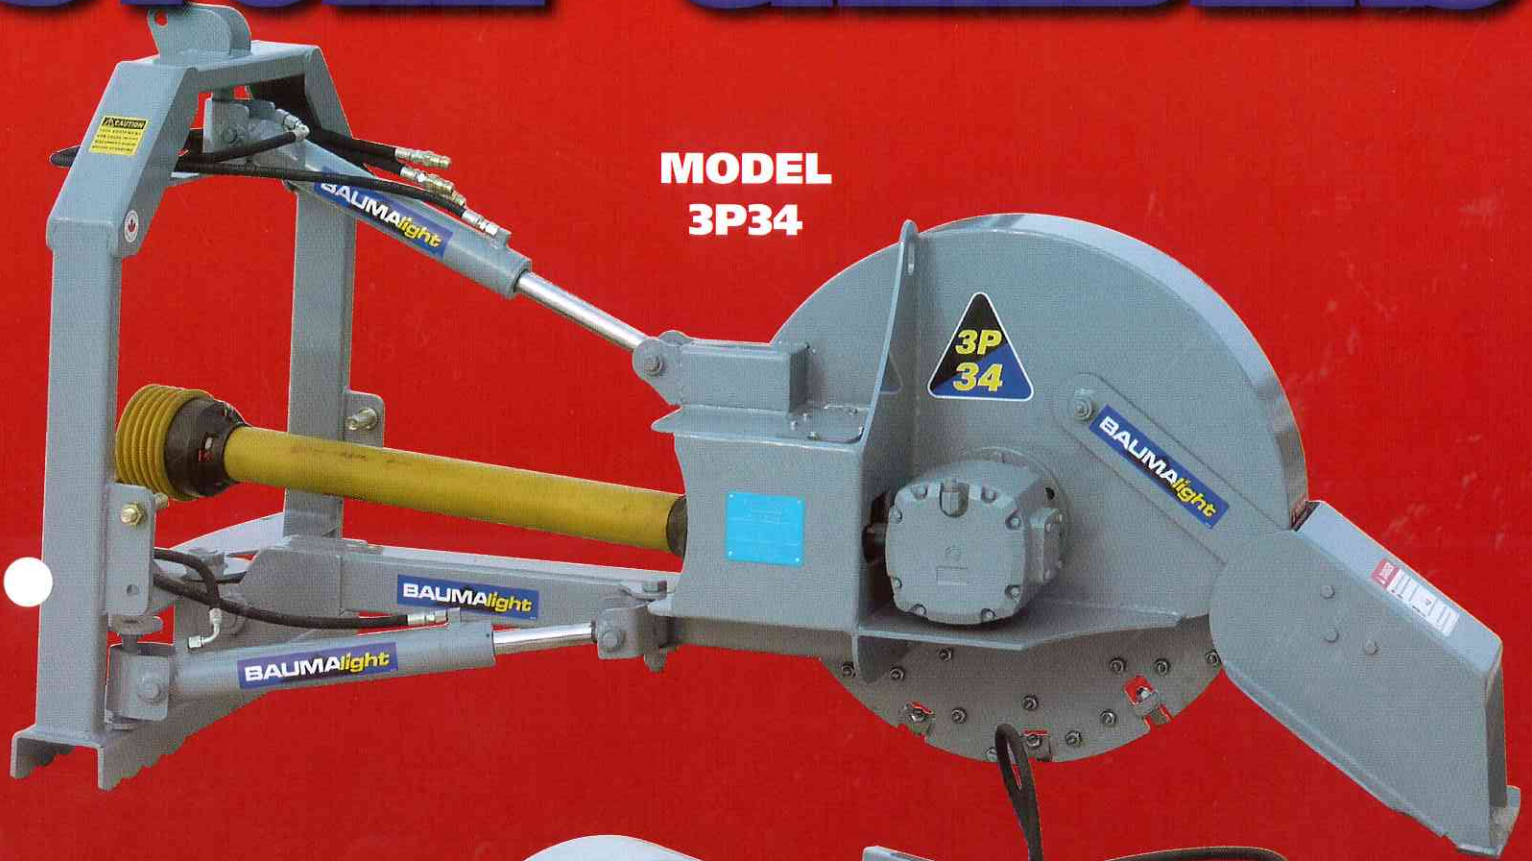

MODEL
S24

**REMOVE UNWANTED STUMPS
QUICKLY AND EASILY!**

BAUMAlight

S1050 Option

Splits one remote hydraulic into two controlled functions.

THREE PO MOD

ALL MODELS

The floating deflector contains the chips and debris and can be swung completely out of the way to cut close to fences.


Grease zerks and replaceable brass bushings provided at major pivot points for extended service life.



FLOW CONTROL

Lets you adjust hydraulic cutting flow to match your tractor size.

MODEL 3P24

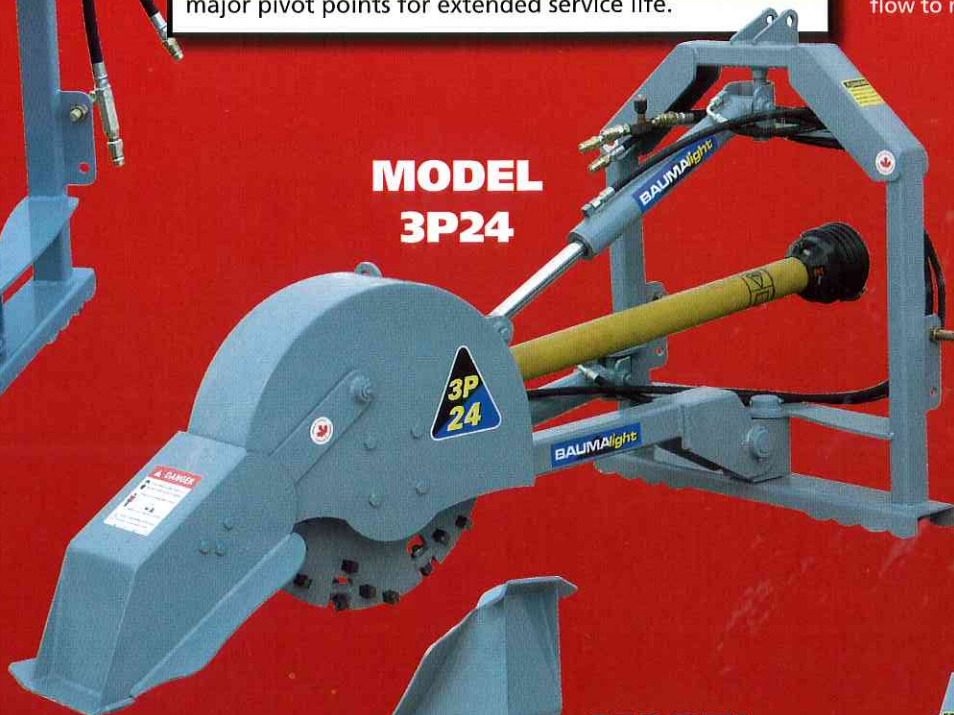

MODEL 3P24



MODELS 3P24 & 3P34

The cutting wheel is powered by the PTO (540) on your tractor with the swing and lift cylinders activated by the standard remotes on the tractor as well.

36 teeth on a 24" cutter and 54 teeth on a 34" cutter means less cutting for each tooth resulting in longer tooth life and smoother cutting for less wear on your tractor.

Units are shipped standard with PTO shaft, CAT II, & standard quick couplers.

QUICK HITCH MODELS



**MODEL
3P34**

STUMP GRINDERS

FEATURE	S18	S24	S28	3P24	3P34
Rotor Size	24"	24"	24"	24"	34"
Number of Teeth	36	36	36	36	54
Cutting Teeth Construction	Carbide Steel Bolt-In				
Cutting Wheel Speed (rpm)	700	700	800	810	810
Cutting Height Above Ground	No Limit	No Limit	No Limit	18"	25"
Cutting Depth Below Ground	10"	10"	10"	8"	14"
Maximum Cutting Depth per Pass	5"	6"	6"	6"	9"
Maximum Horizontal Cut	22"	22"	22"	22"	32"
Swing Arc	0°	80°	80°	65°	65°
Hub Torque	250 ft-lbs.		803 ft-lbs		
Over Torque Protection	Relief Valve			Slip Clutch	
Recommended HP Size	25-80	30-80	50-120	30-60	45-90
Hitch	Quick Attach	Quick Attach	Quick Attach	Cat. I & II	Cat. II
Hydraulic GPM	12-25	18-25	23-35	5-20	5-20
Number of Remotes Required	1	1	1	1 or 2	2
Requires 12 volt DC	Yes	Yes	Yes	No	No
Input Speed	-	-	-	540	540
Unit Weight (Shipping) Lbs.	510	850	1120	880	1320
Unit Width (Shipping)	48"	48"	48"	40"	48"
Unit Length (Shipping)	48"	56"	56"	56"	78"

**HEAVY TOOTH POPULATION MAKES
FINER MULCH AND ALLOWS MUCH
SMOOTHER OPERATION!**

BAUMAlight

SKID-STEER QUICK ATTACH MODELS



MODEL S18
 The S18 has fewer moving parts. The entire hydraulic flow from the skid steer goes directly to the motor for more torque. No additional DC power source is required.



MODELS S24 & S28
 The cutting wheel is powered by the hydraulic remotes on your Skid Steer and the swing cylinder is controlled with a 12v diverter valve. The off set rotor design for greater visibility and needle valve for precise swing control make the S24 & S28 models easy and comfortable to operate. 36 teeth on a 24" cutter means less cutting for each tooth resulting in longer tooth life and smother cutting for less wear on your Skid Steer. Units are shipped with standard skid steer quick attach, 12v cigarette lighter plug, and flat-face quick couplers. Both S24 and S28 have a swing cylinder, which reduces surface disturbance from the tires and better overall control.



MODEL S24



MODEL S28



STUMP SIZING FOR SKID STEER STUMP GRINDER							
Model	12 gpm	15 gpm	20 gpm	25 gpm	30 gpm	35 gpm	40 gpm
S18	7"	14"	20"	24"	-	-	-
S24	6"	12"	18"	24"	-	-	-
S28	7"	15"	24"	36"	48"	60"	-
S28 (high flow kit)	7"	15"	24"	36"	48"	60"	65"

DOUBLE ALL SIZES FOR INTERMITTENT

Baumalight Products Sold By



Manufactured by
MTB MFG INC
 4575 Powell Road, Wallenstein, Ontario N0B 2S0
 Phone: (519) 698-9864 • Fax: (519) 698-1087
 Email: sales@mtbmfg.ca • Web: www.mtbmfg.ca