

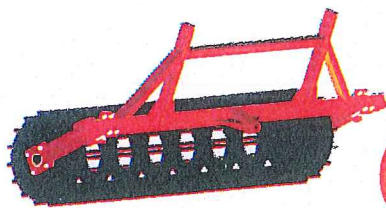


# Extra Heavy Duty Hydraulic Harrow

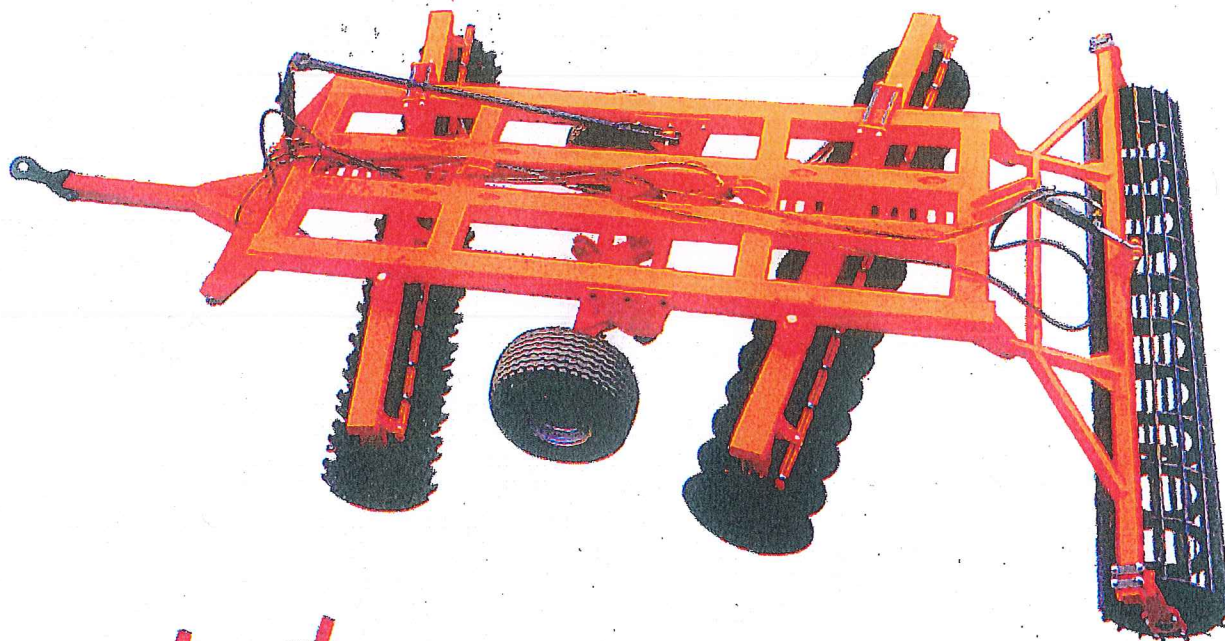

Crumbler  
Optional



Combination of plain & notched disc

Hydraulic cylinder with 4 ton capacity

Tyre locking system

Gang angle lock

Bearing hub

Wider tubeless tyre

Gang axle lock

## SPECIFICATIONS

13' 16"

15' 6"

DESCRIPTION	FKUSHDHH - 24	FKUSHDHH - 28	FKUSHDHH - 32	FKUSHDHH - 36
FRAME (mm)	150 x 150 x 8 T (Sq. Pipe Frame)			
GANG BOLT/AXLE (mm)	40 (Solid Sq. Rod) 1 1/2"			
NO. OF DISC	24	28	32	36
TYPE OF DISC	Notched Disc In Front Gang & Plain Disc In Rear Gang			
DISC DIAMETER (mm)	710 x 7 T (28")			
WIDTH OF CUT (mm Approx.)	3118	3658	4198	4738
DISTANCE BETWEEN DISCS (mm)	270 10 1/2" spacing			
TYRE SIZE	400/60-15.5 (18 PR)			
BEARING HUBS	8		12	
WEIGHT WITHOUT CRUMBLER (Kg. Approx.)	3004	3492	3980	4468 9830lbs
WEIGHT WITH CRUMBLER (Kg. Approx.)	3379	3942	4505	5068 11,150lbs
TRACTOR POWER (HP)	125-140*	145-165*	170-200*	210-235*

\*Due to additional dead weight extra heavy duty hydraulic harrow operates on higher range of tractor (HP)