


Planting unit MTR

PRECISION PLANTERS

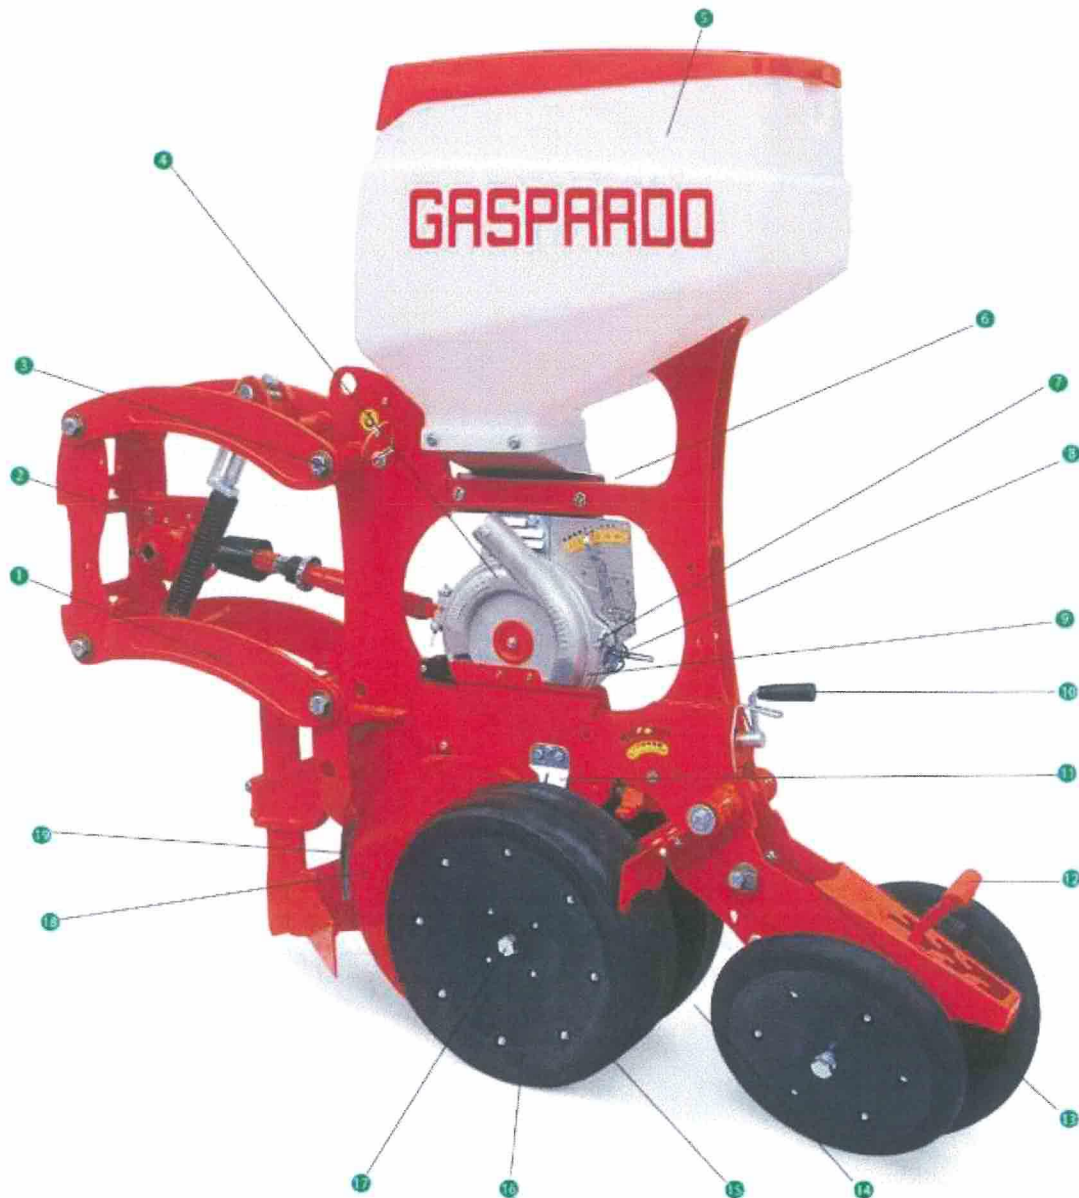

1	ARM STRONG reinforced parallelogram, guarantees constant seeding depth also on uneven terrains and stability at high working speeds
2	Omcinetic PTO shaft drive with quick release, matches high reliability and low maintenance. (Electric row shut off available as OPTION)
3	Sinterized self lubricating bushings. Under load conditions, releases a small oil particles to lubricate the hinge.
4	Seeding precision is guaranteed by the vacuum pneumatic system
5	Standard hopper 1 bushel Optional 1.7 bushel

6	Easy seed plate inspection through the rear window
7	Easy and quick seed plates replacement
8	Standard slide for an easy seed unload
9	Robust distributor body entirely in aluminium
10	Handle for continuous seeding depth adjustment from 3/8" to 4 3/4"
11	Tungsten coated scraper for NO-STOP operation on moist soil
12	Rear closing wheels adjustment with multi position lever. Wheels can be staggered and spaced.
13	Steel gauge wheel support arm with integrated scraper

14	OPT: Excludible INOX seed press wheel Ø 11.1/2", with tungsten coated scraper
15	No wear coulter, for an optimal furrow creation and inner disc cleaning
16	Seeding depth controlled directly on the seed dropping point by two independent gauge wheels
17	Wheel hub with waterproof removable bearings
18	Opening discs diameter 16 1/2", 5/32" thickness. The biggest of its category for a perfect furrow creation in different soil conditions
19	Easy to replace front disc protection