

Models 1500, FWD1500 and 1600, build in the following construction features as standard.

- Adjustability - closing guides, seats, footrest and plant box locations are all adjustable to individual needs to assure faster, more comfortable planting.
- Solid steel, welded frame.
- Adjustable steel chain tighteners prevent packing wheel slippage.


- Steel drive chains, conveyor chains and cast iron sprockets minimize breakage downtime.
- Grease fittings - all moving parts have grease fittings for a long and dependable life span.


Features and options that allow you to custom build your planter, to YOUR requirements.


- Options like coulter blades, bed levelers, rubber packing wheels and cultivator attachments allow you to plant in different conditions, making this the most versatile transplanter on the market. See options on page 12. And, like our rotary planters, these units can be used as a one row or multi-row, either tractor mounted or tractor drawn.



The following hitches are available for the 1600. See pages 6 & 7.

Diamond
Toolbar.

Item #
39706

4"x 4"
Toolbar.

Item #
39707

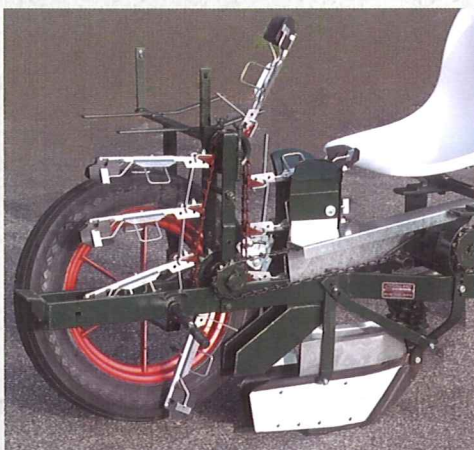
4" X 7"
Toolbar.

Item #
39707

MODEL 1600

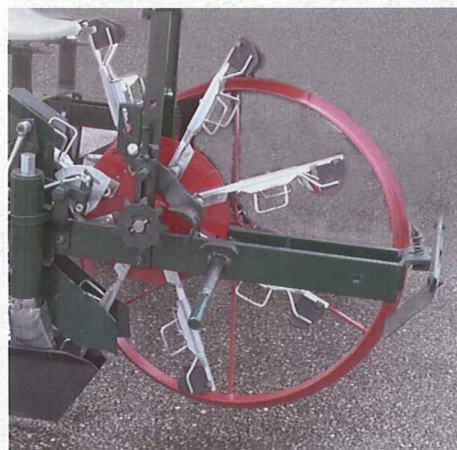
Shown with blunt point furrow opener and fiberglass seats.

Model 1600 can be mounted on any type toolbar for three point mounted multi-row planting arrangements where fertilizer attachments are not being used.

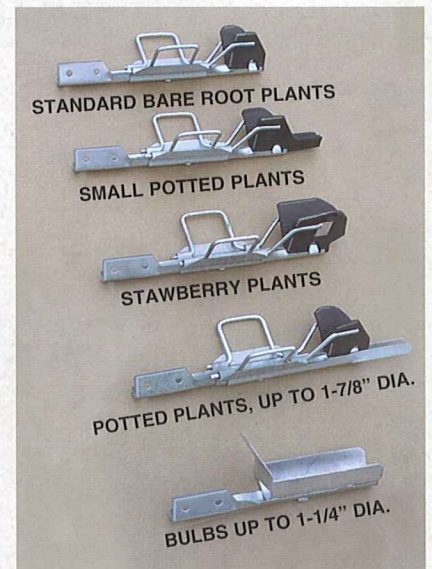
All models also offer the selection of five different plant holders and two different spacing configurations that allow you to get just the right combination needed to best handle your particular crop.



CHAIN HOLDER ARRANGEMENT
Provides plant spacing from 12" to 96"



DISC HOLDER ARRANGEMENT
Provides plant spacing from 3" to 48"



PLANT HOLDERS 5 interchangeable plant holder styles provide for your particular planting requirements.