


FX 9-BAR HYDRAULIC CARTS

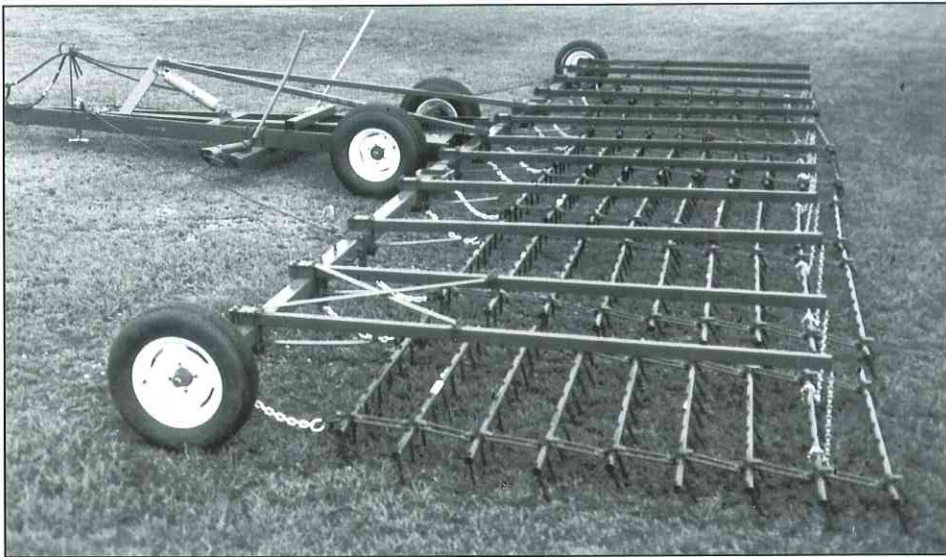


FX9-39 With Flex-9 Sections

The FX cart is a SUPER HEAVY DUTY forward folding unit for use with the 9-bar flexible harrow section (Flex-9 on page 5). The forward folding feature makes it very easy to back the unit up when it is attached to your disk or field cultivator. The FX cart has an easy to use fulcrum system for raising and locking the wing booms into transport position. The FX cart can be modified to handle standard 5-bar flexible harrow sections also.

SPECIFICATIONS

- 6" channel iron cart sides
- 4" x 16" hydraulic cylinder is furnished
- 4" sq. High Strength Tubing in Tool Bar
- All standard 15" wheels
- 11L x 15 tires required for cart
- P205/75R15 required for wing boom
- (Optional) UFX-1100 & UFX-1100A Hydraulic Forward Fold Kits

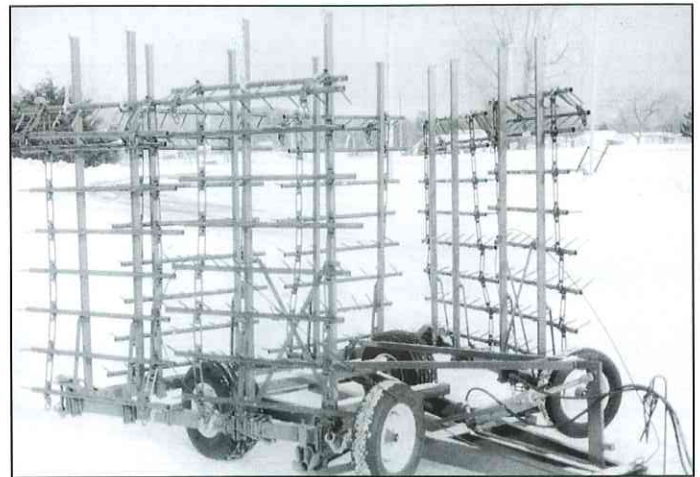

FX9-39 In Transport Position

SPECIFICATIONS

Model	Transport Width	Cutting Width	Harrow Sections Per Unit	Weight (Lbs.)
FX-9-229	11'0"	22'9"	2/Flex-9-5 & 2/Flex-9-6	2467
FX-9-249	11'0"	24'9"	4/Flex-9-6	2507
FX-9-269	11'0"	26'9"	2/Flex-9-6 & 2/Flex-9-7	2577
FX-9-289	11'0"	28'9"	4/Flex-9-7	2647
FX-9-313	13'0"	31'3"	6/Flex-9-5	3001
FX-9-333	13'0"	33'3"	4/Flex-9-5 & 2/Flex-9-6	3041
FX-9-353	13'0"	35'3"	2/Flex-9-5 & 4/Flex-9-6	3081
FX-9-373	13'0"	37'3"	6/Flex-9-6	3121
FX-9-393	13'0"	39'3"	4/Flex-9-6 & 2/Flex-9-7	3259
FX-9-410	13'0"	41'0"	2/Flex-9-6 & 4/Flex-9-7	3545
FX-9-430	13'0"	43'0"	2/Flex-9-6 & 2/Flex-9-7 & 2/Flex-9-8	3609
FX-9-440	13'0"	44'0"	1/Flex-9-6 & 3/Flex-9-7 & 2/Flex-9-8	3644

FXPE-46 Pole Extension (46") is available if desired.
(Standard on FX-9-393 thru 440)

UFX 10-BAR HYDRAULIC CARTS

DON'T BUY A HARROW UNTIL YOU HAVE SEEN THE UFX (Ultimate Flex) SERIES

THE UFX (Ultimate Flex) SERIES... is a line of 10 bar harrows which is a generation beyond any other type of harrow on the market; 10 bars of fully flexible harrow with fast, complete lever adjustment of the tooth pitch for every 5 bars; each 5 bars of harrow can be adjusted to 6 different pitches depending on the situation (the ultimate in tooth pitch adjustability).

Over 90 years of experience in the design and manufacture of harrows and drawbars has brought this easy to use, dependable tool to you. Features a unique, easy to use fulcrum system for raising and locking the wing booms into transport position.

This is the "Ultimate" one-pass harrow for use in HEAVY residue or NO residue; for seedbed preparation, "after-dragging" of crops in no-till or conventional till, or incorporation of chemicals.

FEATURES


Over 14 Hammer-Forged spike teeth per foot of cutting width

6" Channel iron cart sides

4" x 16" Hydraulic cylinder furnished

4" sq. High Strength Tool Bar

UFX-1100 & 1100 hydraulic forward fold kits optional!!

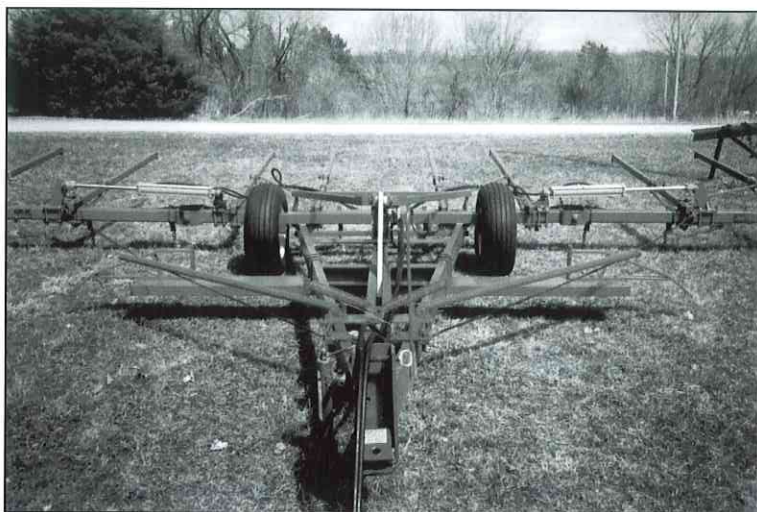

UFX-1100 Auto Fold Kit

SPECIFICATIONS

Model	Transport Width	Cutting Width	Harrow Sections Per Unit	Weight (Lbs.)
UFX 10-239	11'0"	23'9"	2/5'6" & 2/6'0"	2795
UFX 10-249	11'0"	24'9"	4/6'0"	2811
UFX 10-269	11'0"	26'9"	2/6'0" & 2/7'0"	2871
UFX 10-289	11'0"	28'9"	4/7'0"	2931
UFX 10-343	13'0"	34'3"	6/5'6"	3479
UFX 10-353	13'0"	35'3"	4/5'6" & 2/6'0"	3495
UFX 10-363	13'0"	36'3"	2/5'6" & 4/6'0"	3511
UFX 10-373	13'0"	37'3"	6/6'0"	3527
UFX 10-393	13'0"	39'3"	4/6'0" & 2/7'0"	3671
UFX 10-403	13'0"	40'3"	2/5'6" & 4/7'0"	3915
UFX 10-413	13'0"	41'3"	2/6'0" & 4/7'0"	3931
UFX 10-433	13'0"	43'3"	6/7'0"	3991