

PUMA & LYNX SNOWBLOWERS



&



QUALITY ENGINEERED FOR HOME USE.



PUMA



PUMA INVERTED



LYNX



[www.pronovost.qc.ca](http://www.pronovost.qc.ca)  
CONNECTING TO PERFORMANCE.



# PUMA Series



A robust, entry level Pronovost snowblower, with an excellent quality/price ratio that is ideal for light to medium duty work.

## PUMA

8 REGULAR MODELS

4 INVERTED MODELS


Widths : 48" to 96"



**Horse Power  
recommended :**  
16 to 125 HP PTO

### STANDARD FEATURES

- Balanced auger protected by shear bolt.
- Adjustable skid shoes.
- Reinforced 4 bladed rotor.
- Roller bearings encased in ductile cast iron.
- Main heavy duty PTO shaft protected by shear bolt.
- Chute base on antifriction blocks or ring.

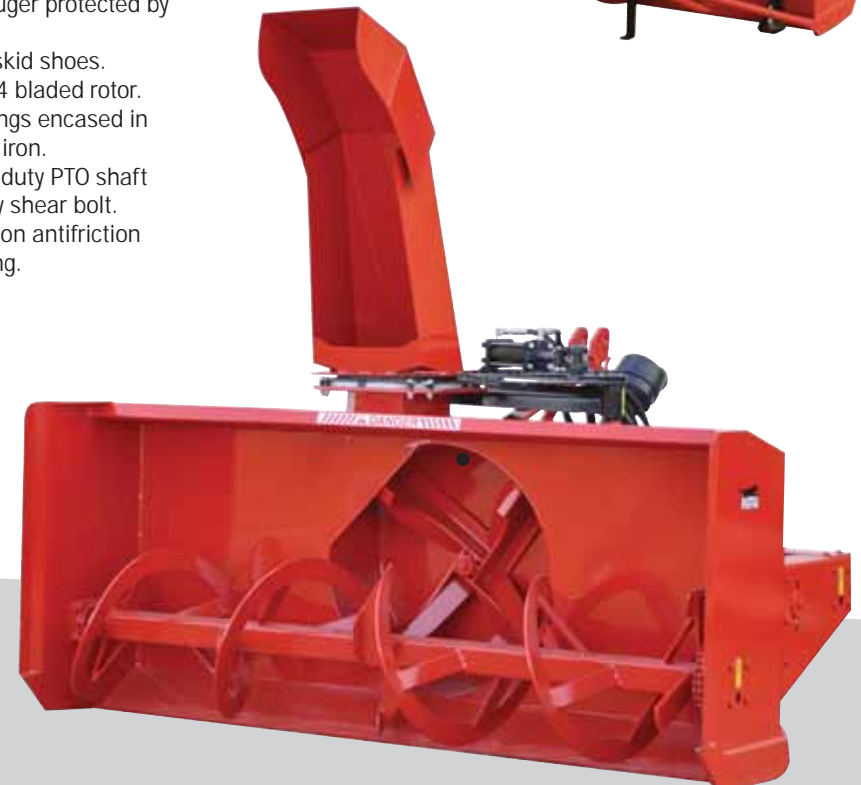

# CHARACTERISTICS & OPTIONS

## CHUTE ROTATION KIT



Now patented  
# 2,541,044

Manual



Now patented  
# 2,541,044

Hydraulic cylinder



Hydraulic motor

Electric motor rotation now available  
on certain models.

## ACCELERATOR



540 / 756  
Ratio 1:1.4

## CHUTE BASE



Antifriction blocks



Antifriction ring

## COLOR



PRONOVOST  
Red



Blue



Landi



Orange



INDUSTRIAL  
Yellow



Green

## CHUTE DEFLECTOR

Electric actuator now available on  
certain models.



Manual



Hydraulic cylinder



## TESTIMONIAL

« Last year I bought a new PUMA-64 Snowblower with a new Kubota B2920. With record snowfall this winter here in Prince Edward Island, I can say that the PUMA is a great snowblower. I recommend it as a well built snowblower who overcomes records winters. »

*Alan MacLeod, Alan MacLeod Electric.  
April 2015.*

SPECIFICATIONS		PUMA-48	PUMA-54	PUMA-64	PUMA-72	PUMA-74	PUMA-84	PUMA-94	PUMA-96
HP recommended (HP PTO)	min.-max.	16-25	16-25	18-30	20-35	25-40	40-75	50-75	80-125
Working width	in. mm	48" 1219	54" 1371	64" 1626	72" 1828	74" 1879	84" 2134	94" 2388	96" 2438
Cutting height	in. mm	25" 635	25" 635	26½" 673	26½" 673	30" 762	34" 864	34" 864	38" 965
Drum diameter	in. mm	21" 533	21" 533	22" 559	22" 559	24" 609	28" 711	28" 711	32" 813
Depth of drum	in. mm	7" 178	7" 178	7" 178	7" 178	8" 203	11" 279	11" 279	11" 279
Number of impeller blades		4	4	4	4	4	4	4	5
Impeller shaft diameter	in. mm	1" 25	1" 25	1¼" 32	1¼" 32	1⅞" 40	1⅞" 40	1⅞" 40	2" 51
Impeller RPM		540	540	540	540	540	540	540	540
Number of auger		1	1	1	1	1	1	1	1
Main auger diameter	in. mm	16" 406	16" 406	16" 406	16" 406	17" 432	20" 508	20" 508	23" 584
Drive chain		50	50	50	50	60	60	60	80
Hitch category		1	1	1	1	1 & 2	1 & 2	1 & 2	2
Chute base antifriiction		Blocks	Blocks	Blocks	Blocks	Ring	Ring	Ring	Ring
Standard drive shaft		T20	T20	T20	T40	T40	T50	T60	T80
Weight including chute	lbs kg	366 166	374 170	413 187	430 195	639 290	955 433	980 445	1300 590


Design and specifications subject to change without notice.

# PUMA INVERTED Series



Introduced in 2015, the Puma Inverted Series now comes in 4 models : 64", 72", 74" and 80". Same features as with the standard Puma Series, plus the chute rotation kit for hydraulic motor.

New  
2015

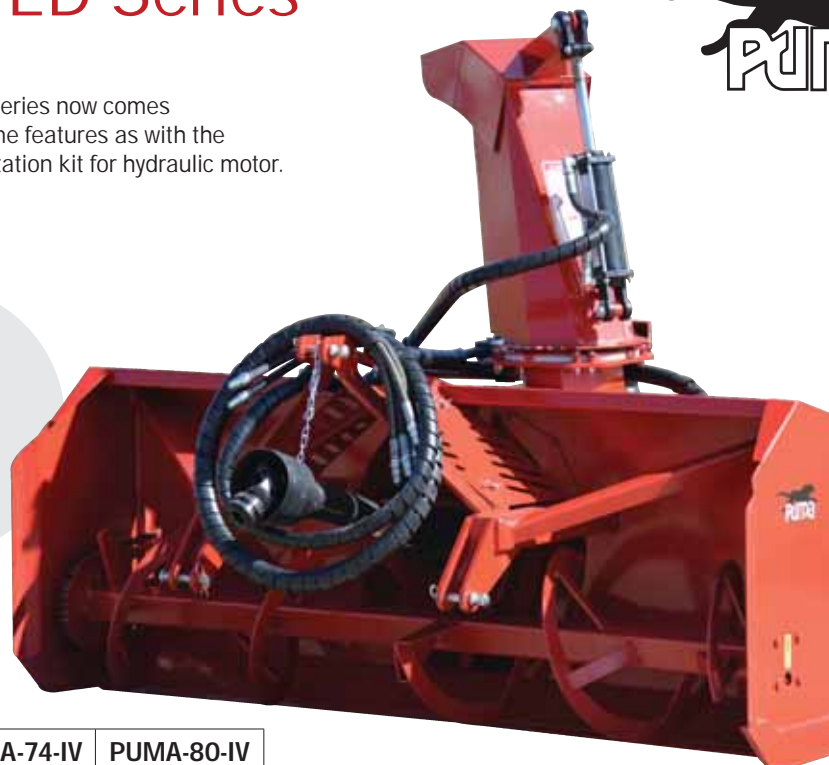

## Inverted models

PUMA-64-IV	PUMA-72-IV	PUMA-74-IV	PUMA-80-IV
18-35	18-35	35-60	35-60
64" 1626	72" 1828	74" 1880	80" 2032
29" 737	29" 737	31" 787	31" 787
24" 609	24" 609	26" 660	26" 660
7" 178	7" 178	9" 228	9" 228
4	4	4	4
1 1/4" 32	1 1/4" 32	1 9/16" 40	1 9/16" 40
540	540	540	540
1	1	1	1
15" 381	15" 381	16" 406	16" 406
50	50	60	60
1	1	1	1
Blocks	Blocks	Ring	Ring
T40	T40	T50	T50
470 213	502 228	702 318	724 328



Design and specifications subject to change without notice.



# LYNX Series



A family of light and economical snowblowers for light duty work.

## LYNX 3 MODELS

Widths : 52", 62", 70"



**Horse Power  
recommended :**  
16 to 25 HP PTO

## STANDARD FEATURES

- Balanced auger protected by shear bolt.
- Adjustable skid shoes.
- Reinforced 4 bladed rotor.
- Roller bearings encased in ductile cast iron.
- Main heavy duty PTO shaft protected by shear bolt.
- Chute base on antifriction blocks.
- Chute deflector adjustment rod.

## OPTIONS

### CHUTE ROTATION

manual, hydraulic cylinder  
or electric motor.

### CHUTE DEFLECTOR

manual, hydraulic cylinder  
or electric actuator.



**ECONOMICAL  
LIGHT**

# Sand and Salt Spreader



Get the maximum from your tractor. One tool to load and spread sand and salt.

**3 MODELS**  
**Widths : 54", 74", 86"**



## STANDARD FEATURES

- Unique UHMW system under the dispenser.
- Bearing protection.
- Automatic dispenser adjustment system.
- Flared side.
- Closed gear box.

## OPTIONS

- Rigid cover.
- Rear 3 point activated by two double action cylinders.
- Bolted Euro or Skid Steer attachment for front installation.



SPECIFICATIONS		LYNX-52	LYNX-62	LYNX-70
HP recommended (HP PTO)	min.-max.	16-25	16-25	16-25
Working width	in. mm	52" 1320	62" 1574	70" 1778
Cutting height	in. mm	25" 635	25" 635	25" 635
Drum diameter	in. mm	21" 533	21" 533	21" 533
Depth of drum	in. mm	6" 152	6" 152	16" 152
Number of impeller blades		4	4	4
Impeller shaft diameter	in. mm	1" 25	1" 25	1" 25
Height - impeller center	in. mm	13" 330	13" 330	13" 330
Impeller RPM		540	540	540
Number of auger		1	1	1
Main auger diameter	in. mm	14" 356	14" 356	14" 356
Drive chain		50	50	50
Hitch category		1	1	1
Standard drive shaft		T20	T20	T20
Weight including chute	lbs kg	322 146	339 153	353 160

Design and specifications subject to change without notice.

## SPECIFICATIONS

SPECIFICATIONS		54	74	86
Spreading width	in. mm	47 1/2" 1207	69" 1753	80" 2032
Overall width	in. mm	52 3/4" 1340	74" 1880	86" 2184
Overall width with rigid cover	in. mm	53 3/4" 1365	75 1/2" 1917	87 3/4" 2229
Height	in. mm	35 1/4" 895	35 1/4" 895	41 1/4" 1048
Depth without hitch	in. mm	33 1/4" 845	33 1/4" 845	36 1/2" 927
Capacity		0,50 V <sup>3</sup> 0,39 m <sup>3</sup>	0,70 V <sup>3</sup> 0,54 m <sup>3</sup>	1,15 V <sup>3</sup> 0,88 m <sup>3</sup>
Hydraulic motor		Included	Included	Included
Dispenser opening		Automatic adjustment with spring		
Weight	lbs kg	488 221	639 290	781 354

Design and specifications subject to change without notice.

Discover the PRONOVOST SERIES for commercial snow removal.



PRONOVOST GROUPS I, II AND III



INVERTED



PXPL / X-PRO



Visit our NEW WEBSITE !  
[www.pronovost.qc.ca](http://www.pronovost.qc.ca)

- ✓ See our snowblowers in action.
- ✓ Learn more about our snowblowers.
- ✓ Compare models.
- ✓ Find the right snowblower for you.
- ✓ Discover the whole product range.

Discover the INDUSTRIAL SERIES for public works.



SEMI-INDUSTRIAL (PGS)



INDUSTRIAL, OPEN FLIGHT AUGER (PGV)



INDUSTRIAL, FULL FLIGHT AUGER



FOR SIDEWALK



MOTORIZED



**CONNECTING TO PERFORMANCE**

Les Machineries PRONOVOST INC.  
 260, Haut du Lac Sud (route 159), St-Tite, Quebec, Canada, GOX 3H0  
 Tel.: (418) 365-7551 Fax: (888) 652-9270  
 info@pronovost.qc.ca • www.pronovost.qc.ca



Printed in Canada 07/2016

