



Since 1920

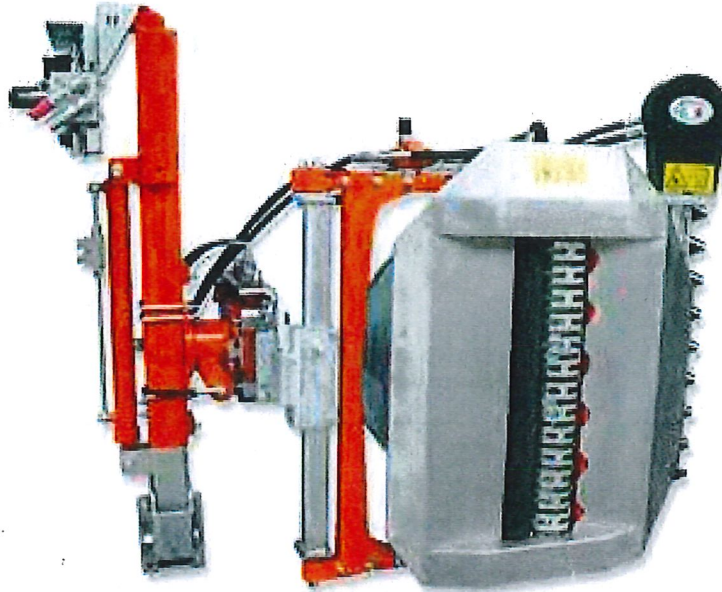

DRF - DOUBLE BARREL LEAF REMOVER ON ROTATING FRAME TOWER-1

Standard machine:

T1 FRAME	SAFETY	TO THE TRACTOR
<ul style="list-style-type: none"> - Hydraulic distributor 4+1 - Hydraulic lifting cm 70 - Vertical frame hydraulic tilting +/-20° - Hydraulic and manual side shift cm 50 - Hydraulic flipping device 180° - Speed control valve for rolles 	<ul style="list-style-type: none"> - Maximum pressure valve for motors - Safety parallelogram device with gas spring - Hydraulic stand for storage 	<ul style="list-style-type: none"> - N.1 double-acting hydraulic distributor - N.1 pressure free return - 30-40 Liter/min

CODE	MODEL	C		ROLLER HEIGHT
		min cm	MAX cm	cm
6DRFT160GA	DRF G A	40	90	60
6DRFT160GB	DRF G B	60	110	60

CODE	ACCESSORIES
"E"	Price increase for electro-hydraulic controls with joystick 4+1 for tractors with cabin
"P"	Price increase for electro-hydraulic controls with PROPORTIONAL joystick 4+1 for tractors with cabin
32792	Coupling frame (specify tractor's model)
10890	3 points coupling for reversible tractors or with front lift
35675	Front cutter bar cm 66
"T"	Deduction hydraulic distributor

