



Since 1920

Rinieri

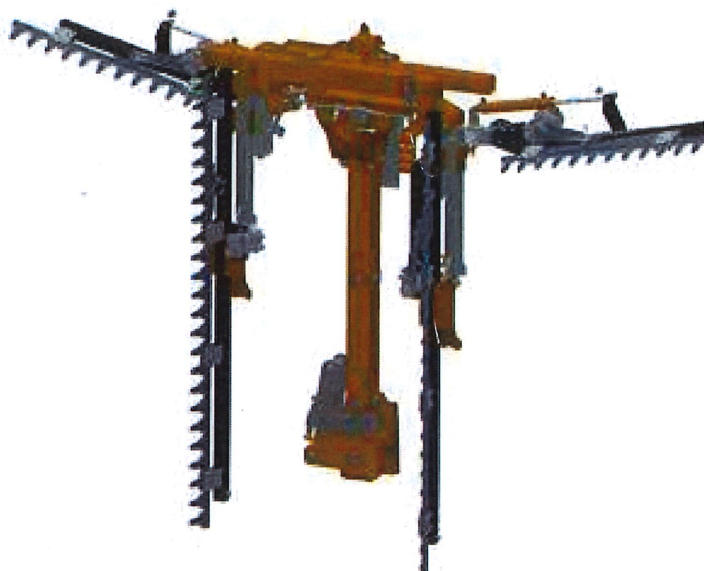

DOUBLE SICKLE BAR PRUNING MACHINE CRL TOWER-2 L

standard machine

T2 FRAME	SAFETY	TO THE TRACTOR
<ul style="list-style-type: none"> - Electro-hydraulic distributor with joystick 7+1 - Hydraulic lifting cm 70 - Vertical frame hydraulic tilting +/-20° - Hydraulic side shift - Horizontal bars hydraulic tilting 90° - Manual height adjustment horizontal bars cm 35 - Manual tilting vertical bars +/-11° 	<ul style="list-style-type: none"> - Maximum pressure valve for motors - Safety joint spring for vertical bars - Safety joint spring for top with closure for road transport - Hydraulic stand for storage 	<ul style="list-style-type: none"> - N.1 double-acting hydraulic distributor - N.1 pressure free return - 20-30 Liter/min - 12 volt socket

CODE	MODEL	A cm	B cm	C min cm	C MAX cm	D min cm	D MAX cm	€
6CRLT243LAF	CRL T2 A 150+80 F	150	80	75	135	125	185	
6CRLT243LBF	CRL T2 B 150+80 F	150	80	105	185	155	235	
6CRLT243LCF	CRL T2 C 150+80 F	150	80	160	260	215	315	
6CRLT253LAF	CRL T2 A 180+80 F	180	80	75	135	125	185	
6CRLT253LBF	CRL T2 B 180+80 F	180	80	105	185	155	235	
6CRLT253LCF	CRL T2 C 180+80 F	180	80	160	260	215	315	
6CRLT263LAF	CRL T2 A 210+80 F	210	80	75	135	125	185	
6CRLT263LBF	CRL T2 B 210+80 F	210	80	105	185	155	235	
6CRLT263LCF	CRL T2 C 210+80 F	210	80	160	260	215	315	

CODE	ACCESSORIES	€
33080	Shoot conveyor for pruning machine	
32785	Coupling frame for tractor for double side machine (specify tractor brand and model)	
10890	3 points coupling for reversible tractors or with front lift	
4545002	Hydraulic height adjustment of top bars 35 cm (+2 movements)	
4509902	Hydraulic tilt cutting bars (+2 movements)	

N.B. if both optional 4545002 and 4509902 are adopted, the hydraulic PTZ will be operated by the tractor levers

