

# INTERLOK®

U.S. Patent 9,127,513

Innovative coupler system allows the Aggressor® auger to be equipped with three different connection sizes (R-200 / R-256 / H-200)


# AGGRESSOR®

Pengo's "go-to" auger bit for general landscaping and construction applications.

# BORH®

U.S. Patent 7,669,673

Innovative design transforms a standard Pengo dirt Aggressor® into a robust rock auger.

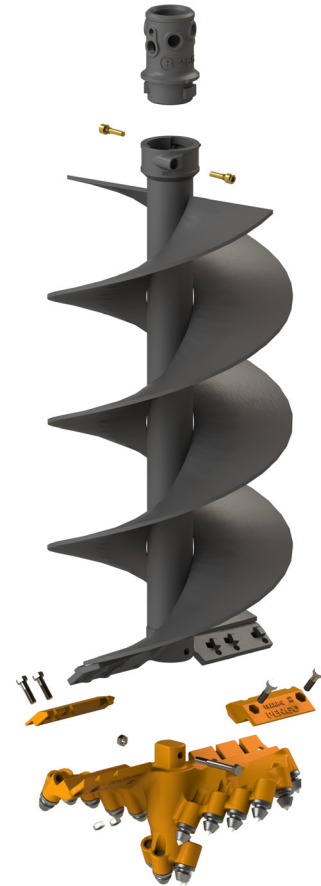

R-200    R-256    H-200

3 Sizes of Interlok® Couplers

A solution for dealers and customers that need to adapt auger bits to various types of auger drives.

# INTERLOK®

InterLok® US Patent 9,127,513

# INTERLOK®

U.S. Patent 9,127,513

Innovative coupler system allows the Aggressor® auger to be equipped with three different connection sizes (R-200 / R-256 / H-200)

# TRIMAX®

Pengo's general purpose auger designed to handle your most challenging applications across a variety of drilling conditions.



A solution for dealers and customers that need to adapt auger bits to various types of auger drives.

# INTERLOK®


InterLok® US Patent 9,127,513

## What is InterLok®?

The InterLok® system is a variable geometry auger bit coupler. The coupler allows the auger bit to utilize different coupler connections. The ability to use different connection sizes can eliminate the need for auger bit adapters. The new coupler system also allows for more universal adaptability to different types of auger drives that use various output shaft sizes and shapes.

### HOW IT WORKS:

1. The Coupler is inserted into the Collar by aligning the Coupler Drive Lugs with the Collar openings located on the top ring of the Collar.
2. The Coupler is inserted into the Collar until the shoulder on the Coupler interfaces with the top of the Collar.
3. The auger coupler is rotated in a clockwise manner to engage the Coupler Lugs with the recessed areas in the Collar. "Twist and Lock".
4. Install the locking hardware. Thread the Positive Lock Pin into the Collar Ears. Positive Lock Bolts have a push button that initiates ball action and retraction.

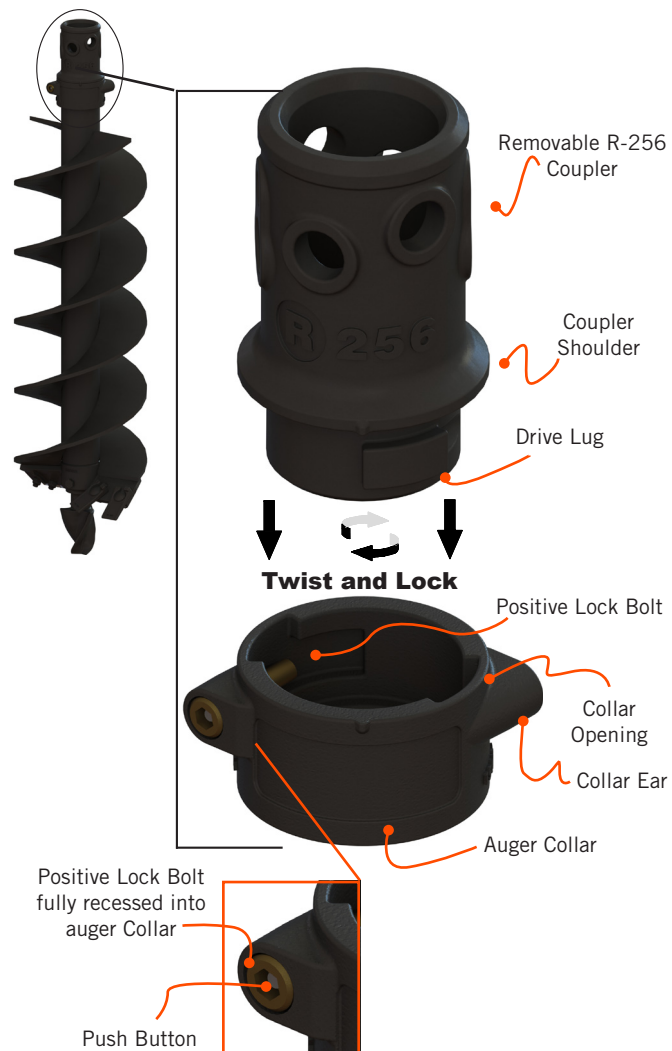

**INTERLOK**®

InterLok® US Patent 9,127,513